



TX7932

Handheld Programmer

Feature and Benefits

- Write, read and erase device parameters
- Pluggable cable with end alligator clip to hold tight the terminals
- LCD display and functional keys
- Low current consumption for longer battery lifespan
- Circuit protection against clip
- Auto power-off within 3 minutes

Overview

The TX7932 is the general purpose programming tool use for TX7000 family products. This unit is designed to suit for entering device parameters such as address, sensitivity, mode and types to meet the site situation and environmental requirements. In addition, the programmer is capable to read the previous encoded parameters to use for testing application and troubleshooting purposes.

The TX7932 is miniature and robust design makes it convenient to bring in the work place. The programmer is packed with twin 1.5V AA battery and cable, ready for usage once received. Easy to understand the display and with functional keys allow easy single-button activation of the common used parameters.



TANDA Development Pte.Ltd.
217 Kallang Bahru #04-02
Singapore 339347
Tel: (65) 6291 3176
Email: info@tandatech.com
Web: www.tnafirealarm.com


TANDA Development Pte.Ltd. | DATASHEET

Copyright © The information contained within these data sheets remains the property of TANDA Development Pte.Ltd. and is not to be altered or reproduced without written permission. TANDA reserves the right to change any specification without giving prior

Technical Specification

Battery Required	2X1.5 AA / Included
USB Links	MICRO-USB Link for power supply
Current Consumption	Standby 0 μ A, In-use: 20mA
Protocol	T&A
Material / Colour	ABS / Grey Glossy finishing
Dimension / LWH	135 mm x 60 mm x30 mm
Humidity	0 to 95% Relative Humidity, Non condensing

Installation and Wiring

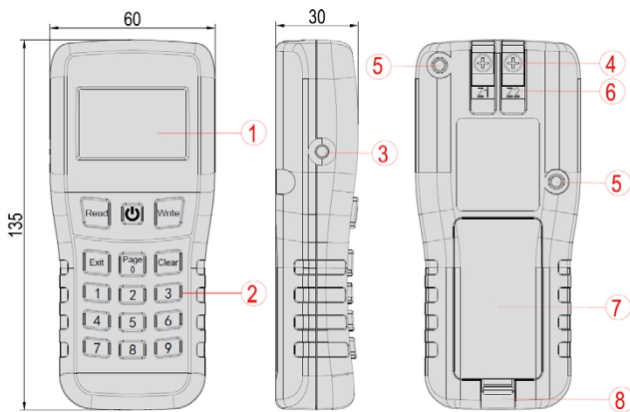

Terminal Description

- 1 Data Display** 16 Characters, four-segment display shows the device address, set types and mode and ID value
- 2 Function Key** Allow easy single-button activation of the common used parameters such as **exit**, **clear**, **page**, **read** and **write** function 0 to 9 keys used to enter numeric values
- 3 Jack Socket** Location for male connector of programming cable
- 4 Cross Screw** Fixed metal contact sheet
- 5 Fixed Detector** Install the detector base with this
- 6 Metal Contact sheet** Connection to signaling loop used for testing the loop wiring
- 7 Battery cover** Location for programmer batteries
- 8 MICRO-USB Link** Connect MICRO-USB to Power Handheld for power supply

