



TN7101

Fire Telephone Mobile Handset

Feature and Benefits

The handset can be taken along so that it is convenient for fire management personnel to use.

Using special telephone chip with clear and reliable talk.

The handset can directly call a fire telephone control panel as it is plugged into a jack socket

Overview

TN7101 Fire Telephone Mobile Handset (called the handset for short) is a portable telephone plugged into a jack socket for transmitting and receiving signals with a fire telephone control panel . The handset can constitute a fire telephone system together with TN7000 Fire Telephone Control Panel , TN7100 Addressable Handset, TN7300 Addressable Fire Telephone Jack Socket and TN7301 Fire Telephone Jack Socket.



TANDA Development Pte.Ltd.

217 Kallang Bahru #04-02
Singapore 339347

Tel: (65) 6291 3176

Email: info@tandatech.com

Web: www.tnafirealarm.com

TANDA Development Pte.Ltd. | DATASHEET

Copyright © The information contained within these data sheets remains the property of TANDA Development Pte.Ltd. and is not to be altered or reproduced without written permission. TANDA reserves the right to change any specification without giving prior

Technical Specification

Compliance	GB 16806-2006
Operating Voltage	24V DC (Telephone bus 18V~28V)
Operating Current	≤25mA
Wiring	Connect with Jack Sockets through non-polarized telephone bus
Voice Frequency	300Hz~3400Hz
Plug	3.5mm mono audio plug
Colour	Color of the Enclosure: red
Dimension	L:199.8 x W:50.0 x H:38.5 mm
Weight	0.16 Kg
Operating Temperature	-10°C~+55°C
Humidity	0 to 95% Relative Humidity, Non condensing

Structure

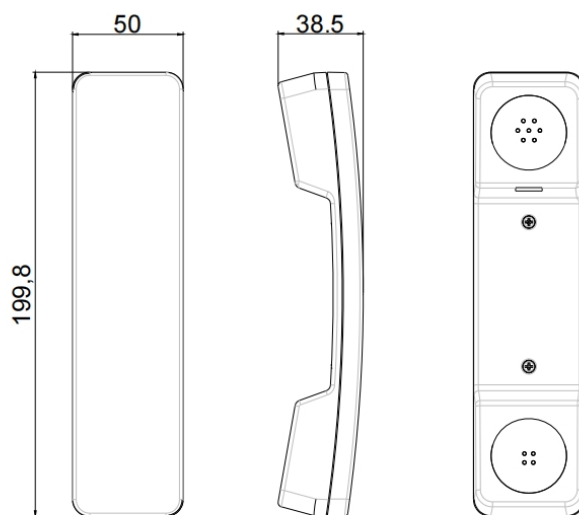


Fig. 1

